


Temperature and Humidity Datalogger



Model DT-172



Specifications		
	DT-172	DT-172TK
Temp range	-40 to 70°C -40 to 158°F	-40 to 70°C -40 to 158°F
Temp Accuracy	±1°C	±0.5°C
Humidity range	0 to 100%RH	0 to 100%RH
Humidity Accuracy	±3.5%RH	±3.5%RH
Temp K range		-200 to 1370°C(-328 to 2498°F)
Temp K Accuracy		Above -100°C (-148°F): 0.15%rgd+1.0°C(1.8°F) Blow -100°C (-148°F): 0.5%rgd+2.0°C(3.6°F)
Memory	32000(16000 each for temperature and humidity)	
Measuring rate	1sec. to 24h	
Battery life	typically 1-3 years	
Analysis software	Windows 98/2000/XP/Vista/7/Win10	

Accessories :



3.6V Lithium battery, K-Temp probe(172TK), software and clamshell.

Size(HxWxD):94mm x 50mm x 32mm

Weight:91g



Model DT-172TK

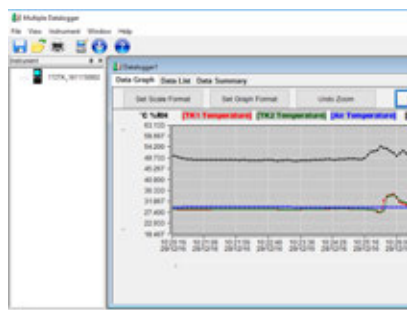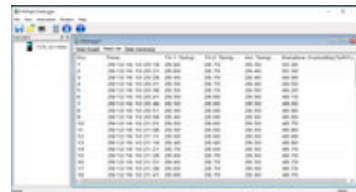

Contact :

EASTERN ENERGY CO.,LTD. (HEAD OFFICE)
 40/4 Vitoondumri Rd., Banbueng, Banbueng, Chonburi 20170
 Tel: 0-3844-6117, Fax: 0-3844-6200
 Email: info@ete.co.th / sale@ete.co.th
 Web: www.eastern-energy.com

EASTERN ENERGY CO.,LTD. (RANGSIT BRANCH)
 801/192 Moo.8 Kukot, Lamlukka, Pathumthani 12130
 Tel: 0-2531-3833, Fax: 0-2531-3833
 Email: info@ete.co.th / sale@ete.co.th
 Web: www.eastern-energy.com