

DT-8893/8894

CMM/CFM Thermo-Anemometers with IR temperature



CFM/CMM Thermo-Anemometer with built-in non-contact IR Thermometer measure remote surface temperature to 500°C (932°F) and 30:1 distance to spot ratio.



Features	
Simultaneous display of Air Flow or Air Velocity plus Ambient Temperature	
Easy to set Area dimensions (cm ²) are stored in the meter's internal memory for the next power on	
Resolution of 0.01m/sec	
20 points average for Air Flow	
Super large (9999 counts) LCD Backlit Display	
3% velocity accuracy via low friction 2.83"D (72mm) ball bearing vane wheel on 3.9ft (120cm) cable	
Complete with vane sensor with 3.9ft (120cm) cable, 9V battery, and protective rubber holster	
MAX/MIN, Data Hold functions	


Specifications				
Air Velocity	Range	Accuracy	8893	8894
m/s(meter per second)	0.40~30.00	±3% ±0.20m/s	*	*
ft/min(feet per minute)	80~5900	±3% ±40ft/min	*	*
km/h(kilometers per hour)	1.4~108.0	±3% ±0.8km/h	*	*
MPH(miles per hour)	0.9~67.0	±3% ±0.4MPH	*	*
Knots(nautical miles per hour)	0.8~58.0	±3% ±0.4knots	*	*
Air Temperature	-10~60°C(14-140°F)	± 2.0°C(4.0°F)	*	*
InfraRed Temperature	-50 to -20°C(-58 to -4°F)	± 5.0°C(9.0°F)		*
	-20 to 500°C(-4 to 932°F)	±2% reading		*
Air Flow	Range	Area		
CFM	0-999900	0-999.9 ft ²	*	*
CMM	0-999900	0-999.9 m ²	*	*

Large LCD display

CE
EMC
EN: 61326



Model 8893

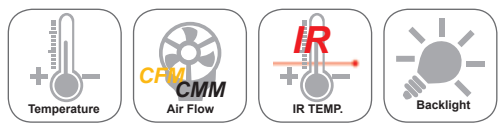

20 points average for Air Flow

Resolution of 0.01m/sec

CE
EMC
EN: 61326



Model 8894

Size(HxWxD): 203mm x 75mm x 50mm
Weight: 280g
Accessories :
9V battery, USB cable, software, Anemo probe and Gift box with carrying case.

