




This Sound Level Data Logger is designed for noise project; quality control; illness prevention and cure and all kinds of environmental sounds measurement. It is applied to the sounds measurement at factory; school; office; traffic access and household, etc.

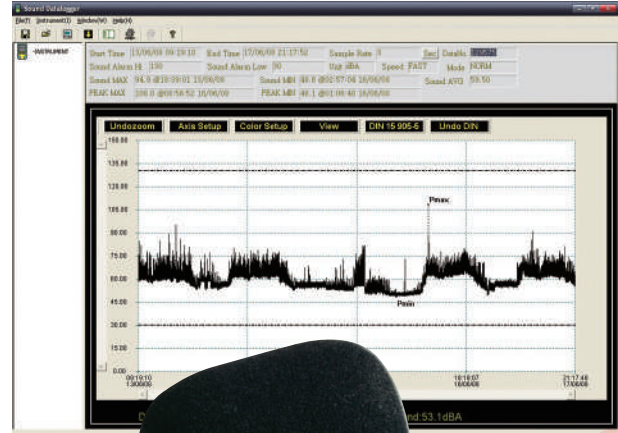

## DT-173

### SOUND LEVEL DATA LOGGER

- | This unit conforms to the IEC61672-1 CLASS2 for Sound Level Meter.
- | NORM (Normal) & PEAK mode
- | Data manage: STORE, REAL TIME
- | Over Range Indication
- | A & C Weighting
- | FAST & SLOW response
- | Software Calibration
- | Manual & Automatic start mode

**Contact :**

**EASTERN ENERGY CO.,LTD. (HEAD OFFICE)**

40/4 Vitoondumri Rd., Banbueng, Banbueng, Chonburi 20170

Tel: 0-3844-6117 Fax: 0-3844-6200

Email: [info@ete.co.th](mailto:info@ete.co.th)

[www.ete.co.th](http://www.ete.co.th)



### General Specifications

Standard Applied	IEC61672-1 CLASS2
Accuracy	±1.4dB
Frequency Range	31.5Hz to 8kHz
Dynamic Range	50dB
Measure Range	30dB to 130dB
Data Memory	129920
Sampling Rate	1 second to 24 hours
Frequency Weighting	A and C
Time Weighting	FAST 125ms, SLOW 1Second
Microphone	1/2 inch electret condenser microphone
Operating Indication	Green LED flash
Memory Full Indication	Yellow LED flash
Data Output	USB data traffic
Power	One 3.6V battery, specs : 14250 or 1/2AAA
Electric Current	When measuring : 5.5mA; when periphery power is off or stop measuring:30uA
Operation Temperature And Humidity	0 to 40°C (32 to 104°F) 10%RH to 90%RH
Storage Temperature And Humidity	-10 to 60°C (14 to 140°F) 10%RH to 75%RH
Dimension	130 x 30 x 25mm (5.1 x 1.1 x 0.9")
Weight	20g (1oz)
System Requirement	Windows 2000   XP   Vista
Minimum Hardware Requirement	8M EMS memory, 2M hard disk, a free USB jack

### Accessories

User Manual, Battery, Windscreen, CD Transparent Cap.

#### Contact :

#### EASTERN ENERGY CO.,LTD. (HEAD OFFICE)

40/4 Vitoondumri Rd., Banbueng, Banbueng, Chonburi 20170  
Tel: 0-3844-6117 Fax: 0-3844-6200  
Email: info@ete.co.th

#### EASTERN ENERGY CO.,LTD. (RANGSIT BRANCH)

801/192 Moo.8 Kukot, Lamlukka, Pathumthani 12130  
Tel: 0-2531-3833, Fax: 0-2531-3833  
Email: info@ete.co.th

